

LCD REMOTE DISPLAY REMOTELF

Overall Dimensions




Display Functions

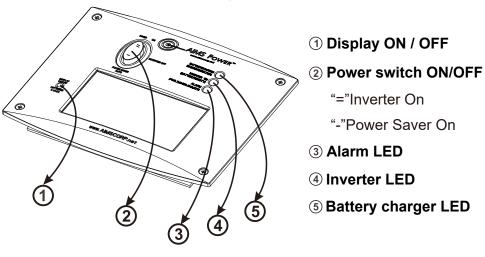


AIMS POWER

www.aimscorp.net

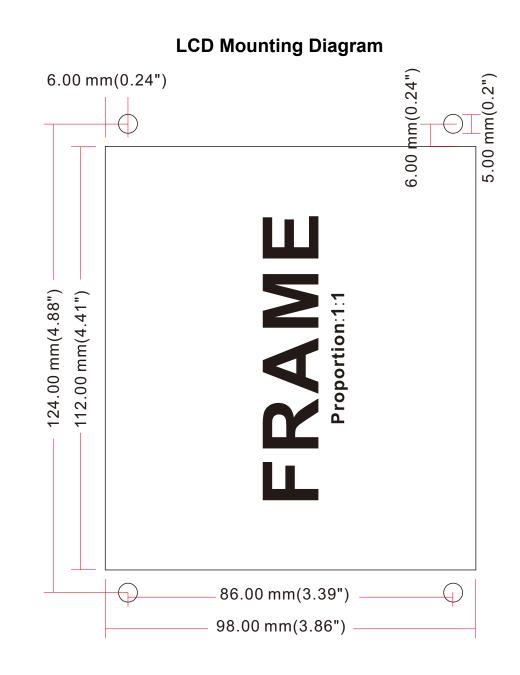

Connection Diagram

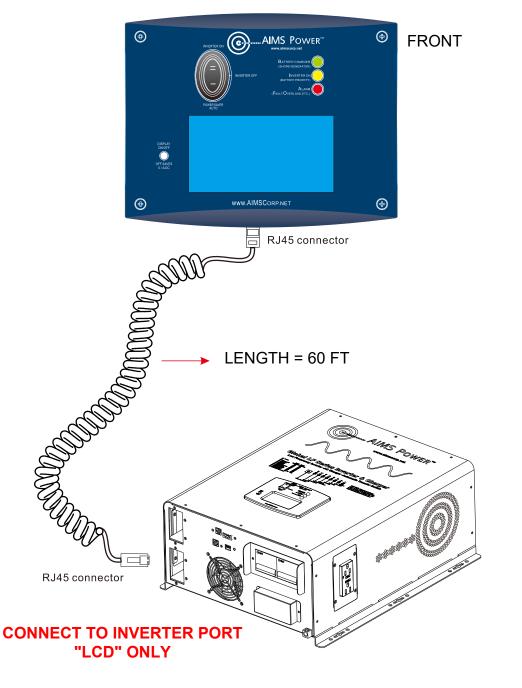


SYSTEM OVERVIEW 1 Input AC: 000 **Output AC:** 000 6 V \mathbf{N} Output Freq: 0000Hz Batt DC: 0000 V 7 2 Work mode: Online Output Load: 000% 8 3 Alarm: NO 4 9 Fault: NO 5

LCD Display Detail

- (1) Shore/ Generator voltage(2) DC voltage on inverter(3) Load when inverting %
- (4) Low/high voltage, over temp, overload
- (5) Fault condition

- (6) AC Output voltage
- (7) Output frequency
- (8) Bypass (online) / inverter mode
- (9) Battery state of charge graph



NOTE: The battery icon is just an image and does not represent battery capacity. The bar graph will change based on battery voltage (2). If using lithium, you may see an instant drop on the graph.

4/21